
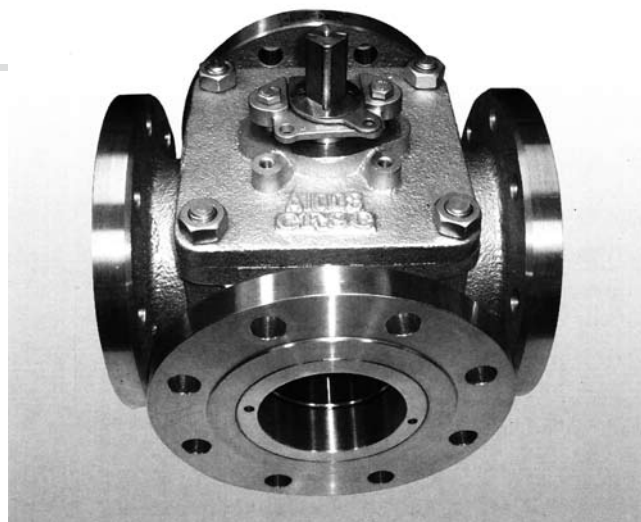


KE-8144

4-WAY TYPE BALL VALVES, FLANGED ENDS

MATERIAL: CF8/CF8M, C.I. FC-20
FLANGED: ANSI 150LB AND JIS 10K
SIZE: DN25~DN250

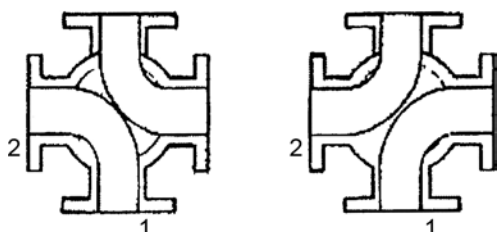

Test Pressure	
10k	10k-240kgf/cm ² (WATER)
150LB	150LB-82kgf/cm ² (WATER)
10k 160LB	6kgf/cm ² (AIR)

BODY: Cast Iron
SUS 304 (CF8), SUS 316 (CF8M)
STEM: SUS304, SUS 316
BALL: SUS304, SUS 316
SEATS: PTFE, REINFORCED PTFE
Stainless Steel: SUS 304, 316
Cast Iron. (FC-20)

DIMENSIONS												Unit:mm
SIZE	d	L	JIS 10kg/cm ² Flange					ANSI 150LB Flange				
			D	t	g	H	h	D	t	g	N	n
1"(25A)	25	100	125	14	90	4	19	103	11.2	79.5	4	15
1 1/2"(40A)	30	100	140	15	105	4	19	127	14.2	96.5	4	15
2"(50A)	60	200	165	16	120	4	19	152	15.9	120.5	4	19
2 1/2"(65A)	54	230	175	18	140	4	19	178	17.6	139.5	4	19
3"(80A)	76	240	185	18	150	8	19	190	19.1	152.5	5	19
4"(100A)	102	280	210	18	175	8	19	228	23.6	180.5	5	19
5"(125A)	127	360	250	20	210	8	25	254	23.9	216	5	22
6"(150A)	152	460	260	22	240	8	23	279	25.4	241.5	5	22
8"(200A)	203	600	330	22	290	12	23	343	25.6	280.5	5	22
10"(250A)	250	750	400	24	335	12	25	406	30.3	362	12	25

Valves are normally furnished with lever handles, but are easily adapted for use with gear or automatic actuators.

Stainless steel static grounding device is a standard feature.