

KE-8251A


DIRECT-ACTIVATED PRESSURE REDUCING VALVE SCREWED ENDS

MATERIAL: S.S. 304/316, BRONZE

SIZE: 1/2" thru 2"

PRESSURE: S.S.: 1~13 kgf/cm²,
BRONZE: 1~9kgf/cm²

TEMPERATURE: S.S.: -15~200°C
BRONZE: -15~80°C

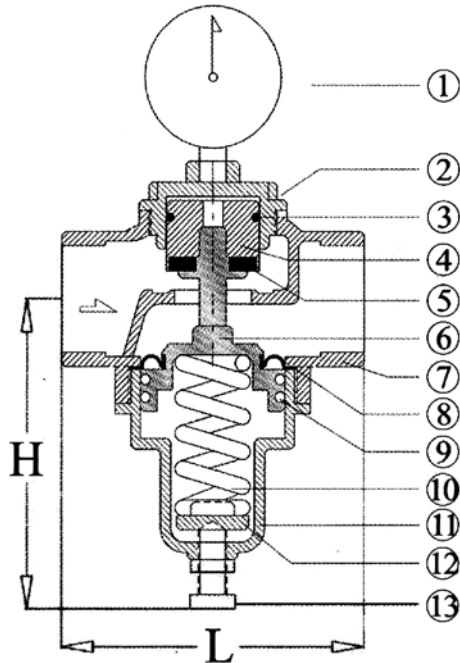

DIMENSIONS

SIZE	H(mm)	L(mm)	Weight(kg)	CV
1/2"	80	70	0.80	2.4
3/4"	105	85	1.00	9.0
1"	105	92	1.05	11.0
1-1/2"	130	115	2.30	21.0
2"	130	120	2.50	25.0

MATERIAL LIST

NO.	PARTS NAME	MATERIAL
1	GAUGE	STAINLESS STEEL / STEEL
2	COVER	316 STAINLESS STEEL / BRONZE
3	O-RING	NBR/VITON
4	PISTON	316 STAINLESS STEEL / BRASS
5	SEALING SPACER	NBR/VITON/TEFLON
6	SHAFT	316 STAINLESS STEEL / BRASS
7	MAIN BODY	316 STAINLESS STEEL / BRONZE
8	DIAPHRAGM	NBR/VITON
9	O-RING	NBR/VITON
10	SPRING	SPRING STEEL
11	SPRING COVER	316 STAINLESS STEEL / ABS
12	WASHER	BRASS
13	ADJUSTING STEM	316 STAINLESS STEEL / BRASS