


KE-8375

2-WAY SOLENOID VALVES, SCREWED ENDS (NORMALLY CLOSED)

MATERIAL: S.S. 316
(INVESTMENT CASTING)
SIZE: 1/2" THRU 2"
(FLUID: WATER & AIR)

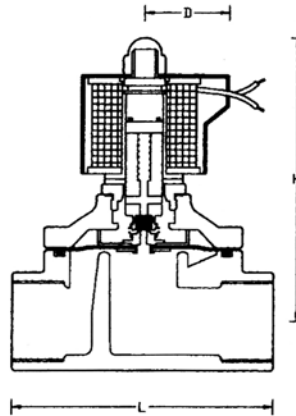

MATERIALS LIST	
PART NAME	MATERIAL
BODY	CF8M
COIL	SPECIAL COPPER WIRE (H)
CORE	STAINLESS STEEL
TUBE	STAINLESS STEEL
SPRING	STAINLESS STEEL
PLUG	NBR. VITON. SILICON
DIAPHRAGM	NBR. VITON. SILICON

PRESSURE/TEMPERATURE RATING						
SIZE	CV	ORIFICE mm	FLUID TEMP. °C	MAX. OPERATING PRESSURE Kgf/CM ²		
				WATER	AIR	
1/2"	4.5	15	-5~80	0-5	0-7	
3/4"	8.6	20	-5~80	0-5	0-7	
1"	12	25	-5~80	0-5	0-7	
1-1/4"	24	35	-5~80	0-5	0-7	
1-1/2"	28	40	-5~80	0-5	0-7	
2"	48	50	-5~80	0-5	0-7	


DIMENSIONS			
SIZE	L	H	D
1/2"	70	100	50
3/4"	73	102	50
1"	93	106	50
1-1/4"	125	140	58
1-1/2"	125	140	58
2"	167	170	58

Unit:mm

KE-8376

2-WAY SOLENOID VALVES, SCREWED ENDS (NORMALLY CLOSED)

MATERIAL: S.S. 316
(INVESTMENT CASTING)
SIZE: 1/2" THRU 2"
(FLUID: STEAM, AIR,
WATER & LIGHT OIL)

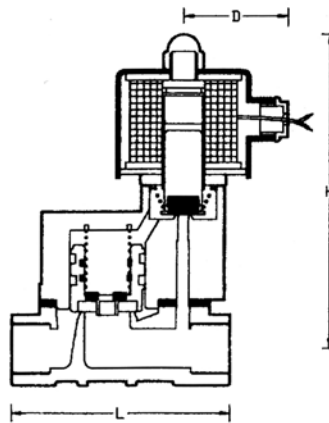

MATERIALS LIST	
PART NAME	MATERIAL
BODY	CF8M
COIL	SPECIAL COPPER WIRE (H)
CORE	STAINLESS STEEL
TUBE	STAINLESS STEEL
SPRING	STAINLESS STEEL
PLUG	PTFE
BONNET/NUT	PTFE
PISTON	CF8M

PRESSURE/TEMPERATURE RATING							
SIZE	CV	ORIFICE mm	FLUID TEMP. °C	MAX. OPERATING PRESSURE Kgf/CM ²			
				STEAM	AIR	WATER	LIGHT OIL
1/2"	4.0	17	-5~185	0.2-10	0.2-10	0.2-10	0.2-10
3/4"	6.0	17	-5~185	0.2-10	0.2-10	0.2-10	0.2-10
1"	12	22	-5~185	0.2-10	0.2-10	0.2-10	0.2-10
1-1/4"	18	30	-5~185	0.2-10	0.2-10	0.2-10	0.2-10
1-1/2"	22	30	-5~185	0.2-10	0.2-10	0.2-10	0.2-10
2"	48	50	-5~185	0.2-10	0.2-10	0.2-10	0.2-10

DIMENSIONS			
SIZE	L	H	D
1/2"	82	120	48
3/4"	82	120	48
1"	100	134	48
1-1/4"	125	146	48
1-1/2"	125	146	48
2"	168	173	48

Unit:mm