


KE-8121


2-PC TYPE BALL VALVES, FLANGED ENDS

FLANGED ANSI 150LB, JIS 10K & DIN PN 16
 MATERIAL: C.I. FC-20, C.S. WCB AND S.S. 304/316
 FULL PORT, SAND CASTING AND INVESTMENT CASTING
 SIZE: 1/2" thru 12"

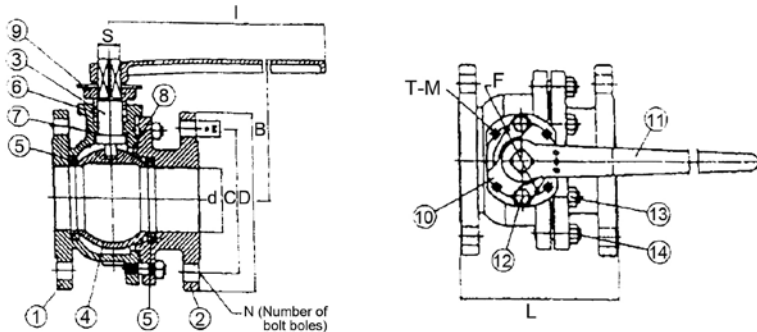

MATERIALS LIST

NO.	PART NAME	MATERIAL			
		FC-20	SUS 304	SUS 316	WCB
1	BODY	FC-20	SUS 304	SUS 316	WCB
2	BODY CAP	FC-20	SUS 304	SUS 316	WCB
3	STEM	SS 41	SUS 304	SUS 316	SS 41
4	BALL	SUS 304	SUS 304	SUS 316	SUS 304
5	BALL SEAT	PTFE	PTFE	PTFE	PTFE
6	GLAND PACKING	FC-20	SUS 304	SUS 316	WCB
7	STEM SEAL	PTFE	PTFE	PTFE	PTFE
8	JOINT GASKET	PTFE	PTFE	PTFE	PTFE
9	GLAND FLANGE	FC-20	SUS 304	SUS 304	WCB
10	TRAVEL STOPPER	SS 41	SUS 304	SUS 304	SS 41
11	HANDLE	FC-20	FC-20	FC-20	FC-20
12	GLAND BOLT	SS 41	SUS 304	SUS 304	SS 41
13	BODY & CAP NUT	SS 41	SUS 304	SUS 304	SS 41
14	BODY & CAP BOLT	SS 41	SUS 304	SUS 304	SS 41

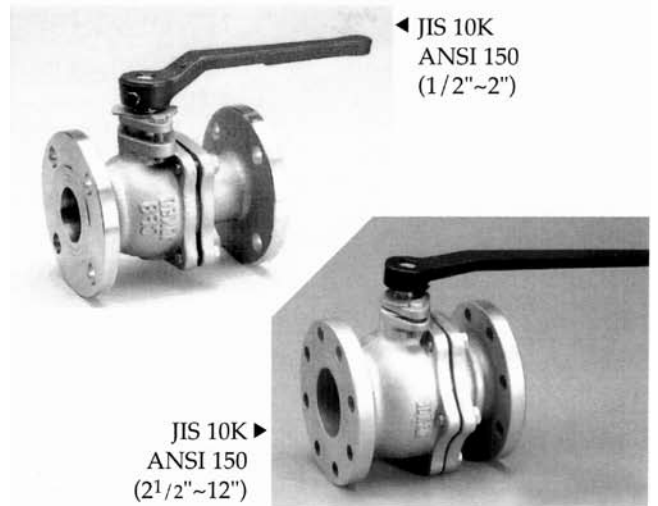

JIS 10K / ANSI 150		DIMENSIONS														Unit:mm
SIZE	inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	
	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	
d		15	20	25	32	38	50	64	78	98	123	148	200	250	298	
L(JIS 10K)		110	120	130	140	165	180	190	200	230	300	340	450	530	620	
L(ANSI 150)		108	117	127	140	165	178	190	203	230	356	394	457	533	620	
D(JIS 10K)		95	100	125	135	140	155	175	185	210	250	280	330	400	445	
D(ANSI 150)		89	98	108	107	127	152	178	190	229	254	279	343	406	483	
H		84	84	84	91	115	120	140	153	171	227	230	297	340	382	
I		175	175	175	175	230	230	340	340	340	700	700	700	800	950	
DIN PN-16																
d		15	20	25	32	38	50	64	78	98	123	148	200	250	300	
L		115	120	125	130	140	150	170	180	190	325	350	400	450	500	
D		95	105	115	140	150	165	185	200	220	250	285	340	405	460	
H		81	84	84	96	114	130	160	170	185	236	243	284	345	380	
I		175	175	175	175	230	230	340	340	340	700	700	700	800	950	
F		50	50	50	50	70	70	70	70	102	125	125	125	140	140	
M		M6	M6	M6	M6	M8	M8	M8	M8	M10	M10	M10	M10	M12	M16	