


# KE-8251S

## PRESSURE REDUCING VALVES, SCREWED ENDS

MATERIAL: ASTM A 351 CF8  
 SIZE: 1/2" thru 2"

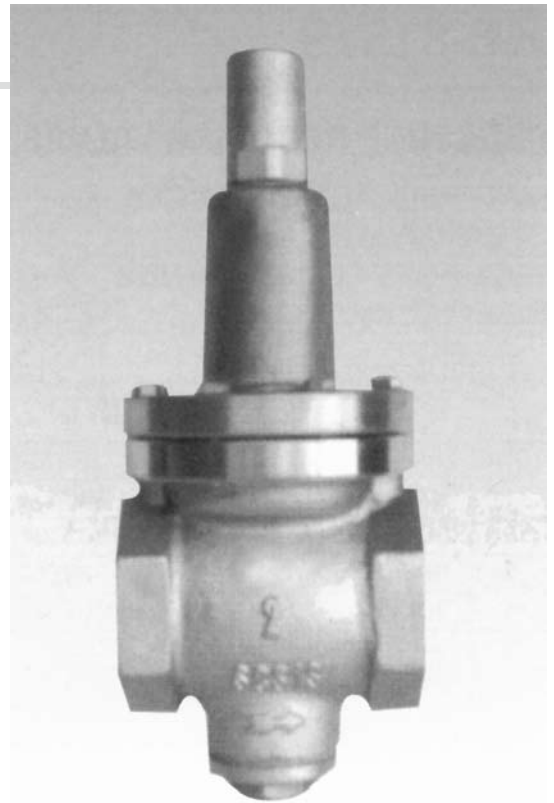

### MATERIALS LIST

NO.	PART NAME	MATERIAL
1	MAIN BODY	CF 8
2	GASKET	ASBESTOS
3	BUTTOM PLUG	CF 8
4	BUTTOM SPRING	SUP-6
5	SPRING KNOB	PTFE
6	STEM	CF 8
7	STEM GUIDE	CF 8
8	GASKET	ASBESTOS
9	BOLT	CF 8
10	SPRING KNOB	CF 8
11	TOP SPRING	SUP-6
12	SPRING HOLDER	CF 8
13	TOP BONNET	CF 8
14	POSITIONING NUT	CF 8
15	ADJUSTING SCREW	CF 8
16	TOP CAP	A356.2
17	DIAPHRAGM DISC	AIS-301

### WORKING CONDITION

WORKING PRESSURE	1-10 KG/CM <sup>2</sup>
MAX. WORKING TEMPERATURE	220 °C
MEDIUM	STEAM

### DIMENSIONS

SIZE	Unit:mm						
	inch	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
	mm	15	20	25	32	40	50
L		95	95	95	130	130	160
H1		55	55	55	72	72	90
H2		185	185	180	205	205	260

